

The Highland Residences

Project:	The Highland Residences
Client:	Highland Construction
Material:	Calacatta Quartz 3cm
Address:	789 Highland Ave, Denver CO
Issue Date:	May 29, 2026
Proj Status:	Draft
Pkg Status:	READY
Prepared By:	Pilot Script
Rev Notes:	Added ADA units, updated kitchen edge profiles

150	3	0	0.0	3	9
Total Units	Total Assemblies	Total Parts	Total Sq Ft	Unit Types	Total Sheets

STANDARD FABRICATION & INSTALLATION NOTES:

- 1. Field verify all dimensions prior to fabrication.
- 2. Ensure all substrate surfaces are level and capable of supporting countertop weight.
- 3. Seam locations shown are suggested; actual locations to be determined by fabricator based on slab sizes.
- 4. All exposed edges to be polished unless otherwise noted.
- 5. Sink/cooktop cutouts must be verified against actual appliance/fixture templates.
- 6. Support brackets required for overhangs exceeding 10 inches.

TABLE OF CONTENTS

Cover Sheet	1
Table of Contents	2
Unit Type A1 - Summary	3
A1 - Kitchen	4
Unit Type A1-MIR - Summary	5
A1-MIR - Kitchen	6
Unit Type B1 - Summary	7
B1 - Kitchen	8
Project Summary	9

1 Bed / 1 Bath


Assemblies: 1 · Parts (pieces): 1 · Stone area: 19.5 sq ft

Units (50):

101, 201, 301, 401, 501, 102, 202, 302, 402, 502, 103, 203, 303, 403, 503, 104, 204, 304, 404, 504, 105, 205, 305, 405, 505, 106, 206, 306, 406, 506, 107, 207, 307, 407, 507, 108, 208, 308, 408, 508, 109, 209, 309, 409, 509, 1010, 2010, 3010, 4010, 5010

Assembly Types:

- Kitchen

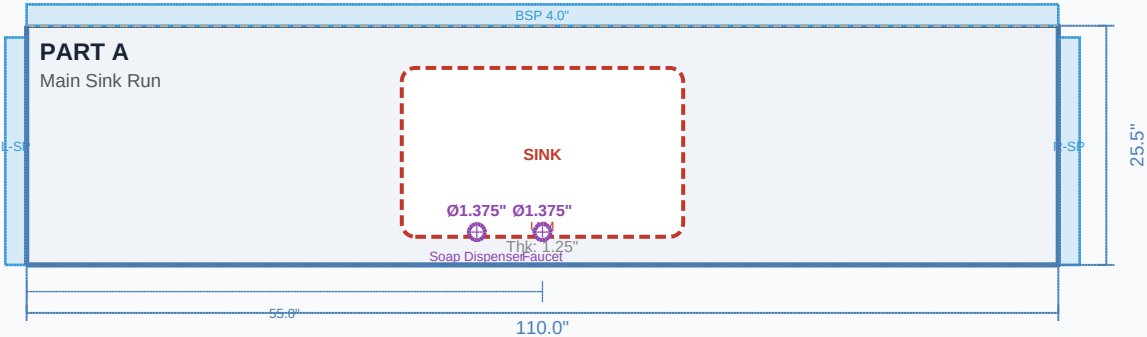

ASSEMBLY DETAILS

Assembly: A1 Kitchen
Type: Kitchen | Variant: STANDARD
FIELD / INSTALLER READINESS
Tag: ASSEMBLE-ON-SITE
Loc: Coordinate with Site Super

PART A — Main Sink Run

110.0" x 25.5" x 1.25" = 19.48 Sq ft

- EDGE SCHEDULE:**
- FRONT: Eased
 - LEFT: Eased
 - RIGHT: Eased
 - BACK: Raw
- CUTOUT SCHEDULE:**
- Sink (Undermount) — 30.0"x18.0" @ X:55.0", Y:12.0"
- HOLE SCHEDULE:**
- Faucet: Ø1.375" @ X:55.0", Y:3.5"
 - Soap Dispenser: Ø1.375" @ X:48.0", Y:3.5"
- SPLASH SCHEDULE:**
- Backsplash — 110.0"x4.0"
 - Left Splash — 24.25"x4.0"
 - Right Splash — 24.25"x4.0"

FABRICATION NOTES:

Template required for wall scribing.

MIRROR

1 Bed / 1 Bath (Mirror)

Assemblies: 1 · Parts (pieces): 1 · Stone area: 19.5 sq ft

Units (50):

111, 211, 311, 411, 511, 112, 212, 312, 412, 512, 113, 213, 313, 413, 513, 114, 214, 314, 414, 514, 115, 215, 315, 415, 515, 116, 216, 316, 416, 516, 117, 217, 317, 417, 517, 118, 218, 318, 418, 518, 119, 219, 319, 419, 519, 120, 220, 320, 420, 520

Assembly Types:

- Kitchen

ASSEMBLY DETAILS

Assembly: A1 Kitchen (Mirror)

Type: Kitchen | Variant: MIR

FIELD / INSTALLER READINESS

Tag: ASSEMBLE-ON-SITE

Loc: Coordinate with Site Super

PART A — Main Sink Run

$110.0 \times 25.5 \times 1.25 = 19.48 \text{ Sq Ft}$

EDGE SCHEDULE:

- FRONT: Eased
- LEFT: Eased
- RIGHT: Eased
- BACK: Raw

CUTOUT SCHEDULE:

- Sink (Undermount) — 30.0"x18.0" @ X:55.0", Y:12.0"

HOLE SCHEDULE:


- Faucet: Ø1.375" @ X:55.0", Y:3.5"
- Soap Dispenser: Ø1.375" @ X:48.0", Y:3.5"

SPLASH SCHEDULE:

- Backsplash — 110.0"x4.0"
- Left Splash — 24.25"x4.0"
- Right Splash — 24.25"x4.0"

FABRICATION NOTES:

Template required for wall scribing.

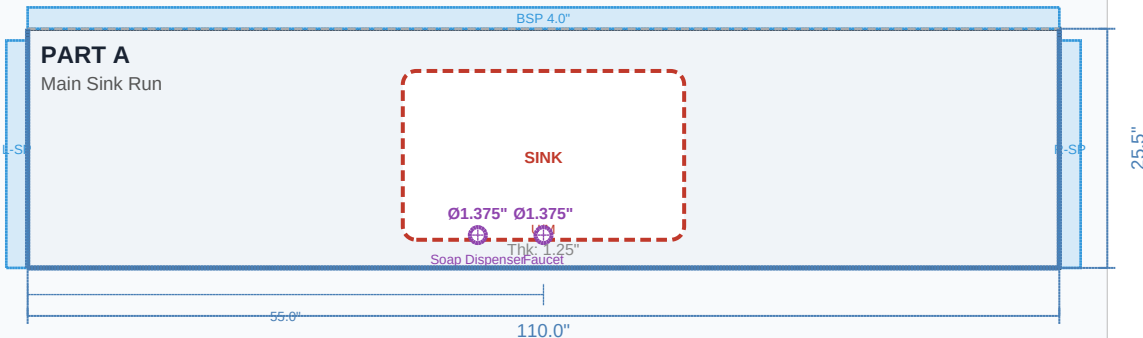

2 Bed / 2 Bath

Assemblies: 1 · Parts (pieces): 2 · Stone area: 26.6 sq ft

Units (50):

121, 221, 321, 421, 521, 122, 222, 322, 422, 522, 123, 223, 323, 423, 523, 124, 224, 324, 424, 524, 125, 225, 325, 425, 525, 126, 226, 326, 426, 526, 127, 227, 327, 427, 527, 128, 228, 328, 428, 528, 129, 229, 329, 429, 529, 130, 230, 330, 430, 530

Assembly Types:

- Kitchen

ASSEMBLY DETAILS

Assembly: B1 Kitchen
Type: Kitchen | Variant: STANDARD

FIELD / INSTALLER READINESS

Tag: ASSEMBLE-ON-SITE
Loc: Coordinate with Site Super

PART A — Sink Run

90.0" x 25.5" = 15.94 sq ft

EDGE SCHEDULE:

- FRONT: Eased
- LEFT: Eased
- BACK: Raw
- RIGHT: Raw

CUTOUT SCHEDULE:

- Sink (Undermount) — 32.0"x18.0" @ X:45.0", Y:12.5"

HOLE SCHEDULE:

- Faucet: Ø1.375" @ X:45.0", Y:4.0"

SPLASH SCHEDULE:

- Backsplash — 90.0"x4.0"

PART B — Range Run

60.0" x 25.5" = 10.62 sq ft

EDGE SCHEDULE:

- FRONT: Eased
- RIGHT: Eased
- BACK: Raw
- LEFT: Raw

CUTOUT SCHEDULE:


- Cooktop (Drop In) — 30.0"x21.0" @ X:30.0", Y:12.5"

SPLASH SCHEDULE:

- Backsplash — 60.0"x4.0"

FABRICATION NOTES:

Dogleg seam requires clear epoxy color match.

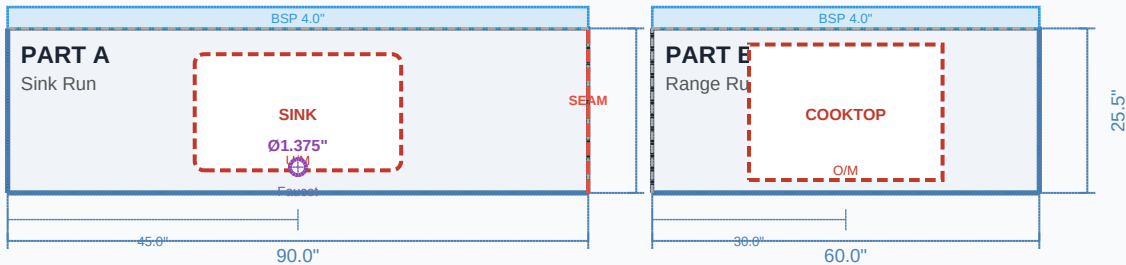

150	3	0	0.00	0
Total Units	Total Assemblies	Total Parts	Stone Area (sq ft)	Stone Area (sq in)

Assembly Breakdown

- Kitchen: 3

Unit Type Breakdown

- Type A1: 50
- Type A1-MIR: 50
- Type B1: 50

Part Type Breakdown