

# The Highland Residences

|              |                                                |
|--------------|------------------------------------------------|
| Project:     | The Highland Residences                        |
| Client:      | Highland Construction                          |
| Material:    | Calacatta Quartz 3cm                           |
| Address:     | 789 Highland Ave, Denver CO                    |
| Issue Date:  | May 29, 2026                                   |
| Proj Status: | Draft                                          |
| Pkg Status:  | READY                                          |
| Prepared By: | Pilot Script                                   |
| Rev Notes:   | Added ADA units, updated kitchen edge profiles |

|             |                  |             |             |            |              |
|-------------|------------------|-------------|-------------|------------|--------------|
| 150         | 3                | 0           | 0.0         | 3          | 9            |
| Total Units | Total Assemblies | Total Parts | Total Sq Ft | Unit Types | Total Sheets |

STANDARD FABRICATION & INSTALLATION NOTES:

- 1. Field verify all dimensions prior to fabrication.
- 2. Ensure all substrate surfaces are level and capable of supporting countertop weight.
- 3. Seam locations shown are suggested; actual locations to be determined by fabricator based on slab sizes.
- 4. All exposed edges to be polished unless otherwise noted.
- 5. Sink/cooktop cutouts must be verified against actual appliance/fixture templates.
- 6. Support brackets required for overhangs exceeding 10 inches.

# TABLE OF CONTENTS

|                                   |   |
|-----------------------------------|---|
| <b>Cover Sheet</b>                | 1 |
| <b>Table of Contents</b>          | 2 |
| <b>Unit Type A1 - Summary</b>     | 3 |
| A1 - Kitchen                      | 4 |
| <b>Unit Type A1-MIR - Summary</b> | 5 |
| A1-MIR - Kitchen                  | 6 |
| <b>Unit Type B1 - Summary</b>     | 7 |
| B1 - Kitchen                      | 8 |
| <b>Project Summary</b>            | 9 |

1 Bed / 1 Bath


Assemblies: 1 · Parts (pieces): 1 · Stone area: 19.5 sq ft

Units (50):

101, 201, 301, 401, 501, 102, 202, 302, 402, 502, 103, 203, 303, 403, 503, 104, 204, 304, 404, 504, 105, 205, 305, 405, 505, 106, 206, 306, 406, 506, 107, 207, 307, 407, 507, 108, 208, 308, 408, 508, 109, 209, 309, 409, 509, 1010, 2010, 3010, 4010, 5010

Assembly Types:

- Kitchen

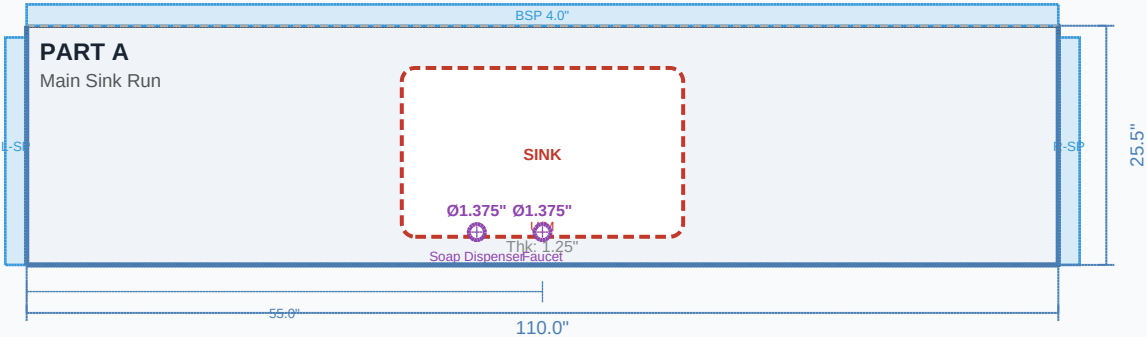

ASSEMBLY DETAILS

Assembly: A1 Kitchen  
Type: Kitchen | Variant: STANDARD

FIELD / INSTALLER READINESS

Tag: ASSEMBLE-ON-SITE  
Loc: Coordinate with Site Super

PART A — Main Sink Run

110.0" x 25.5" x 1.25" = 19.48 Sq ft

EDGE SCHEDULE:

- FRONT: Eased
- LEFT: Eased
- RIGHT: Eased
- BACK: Raw

CUTOUT SCHEDULE:

- Sink (Undermount) — 30.0"x18.0" @ X:55.0", Y:12.0"

HOLE SCHEDULE:

- Faucet: Ø1.375" @ X:55.0", Y:3.5"
- Soap Dispenser: Ø1.375" @ X:48.0", Y:3.5"

SPLASH SCHEDULE:

- Backsplash — 110.0"x4.0"
- Left Splash — 24.25"x4.0"
- Right Splash — 24.25"x4.0"

FABRICATION NOTES:

Template required for wall scribing.

MIRROR

1 Bed / 1 Bath (Mirror)

Assemblies: 1 · Parts (pieces): 1 · Stone area: 19.5 sq ft

Units (50):

111, 211, 311, 411, 511, 112, 212, 312, 412, 512, 113, 213, 313, 413, 513, 114, 214, 314, 414, 514, 115, 215, 315, 415, 515, 116, 216, 316, 416, 516, 117, 217, 317, 417, 517, 118, 218, 318, 418, 518, 119, 219, 319, 419, 519, 120, 220, 320, 420, 520

Assembly Types:

- Kitchen

ASSEMBLY DETAILS

Assembly: A1 Kitchen (Mirror)

Type: Kitchen | Variant: MIR

FIELD / INSTALLER READINESS

Tag: ASSEMBLE-ON-SITE

Loc: Coordinate with Site Super

PART A — Main Sink Run

110.0" x 25.5" x 1.25" = 19.48 Sq ft

EDGE SCHEDULE:

- FRONT: Eased
- LEFT: Eased
- RIGHT: Eased
- BACK: Raw

CUTOUT SCHEDULE:

- Sink (Undermount) — 30.0"x18.0" @ X:55.0", Y:12.0"

HOLE SCHEDULE:


- Faucet: Ø1.375" @ X:55.0", Y:3.5"
- Soap Dispenser: Ø1.375" @ X:48.0", Y:3.5"

SPLASH SCHEDULE:

- Backsplash — 110.0"x4.0"
- Left Splash — 24.25"x4.0"
- Right Splash — 24.25"x4.0"

FABRICATION NOTES:

Template required for wall scribing.

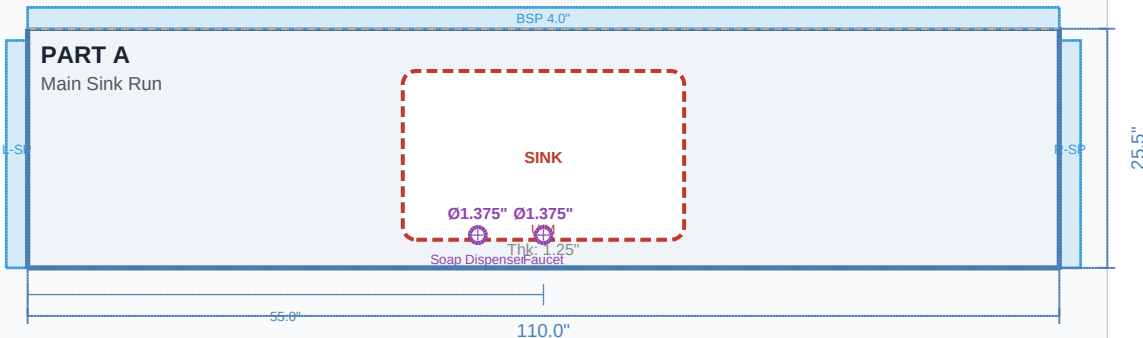

2 Bed / 2 Bath

Assemblies: 1 · Parts (pieces): 2 · Stone area: 26.6 sq ft

Units (50):

121, 221, 321, 421, 521, 122, 222, 322, 422, 522, 123, 223, 323, 423, 523, 124, 224, 324, 424, 524, 125, 225, 325, 425, 525, 126, 226, 326, 426, 526, 127, 227, 327, 427, 527, 128, 228, 328, 428, 528, 129, 229, 329, 429, 529, 130, 230, 330, 430, 530

Assembly Types:

- Kitchen

ASSEMBLY DETAILS

Assembly: B1 Kitchen  
Type: Kitchen | Variant: STANDARD

FIELD / INSTALLER READINESS

Tag: ASSEMBLE-ON-SITE  
Loc: Coordinate with Site Super

PART A — Sink Run

90.0" x 25.5" = 15.94 sq ft

EDGE SCHEDULE:

- FRONT: Eased
- LEFT: Eased
- BACK: Raw
- RIGHT: Raw

CUTOUT SCHEDULE:

- Sink (Undermount) — 32.0"x18.0" @ X:45.0", Y:12.5"

HOLE SCHEDULE:

- Faucet: Ø1.375" @ X:45.0", Y:4.0"

SPLASH SCHEDULE:

- Backsplash — 90.0"x4.0"

PART B — Range Run

60.0" x 25.5" = 10.62 sq ft

EDGE SCHEDULE:

- FRONT: Eased
- RIGHT: Eased
- BACK: Raw
- LEFT: Raw

CUTOUT SCHEDULE:


- Cooktop (Drop In) — 30.0"x21.0" @ X:30.0", Y:12.5"

SPLASH SCHEDULE:

- Backsplash — 60.0"x4.0"

FABRICATION NOTES:

Dogleg seam requires clear epoxy color match.

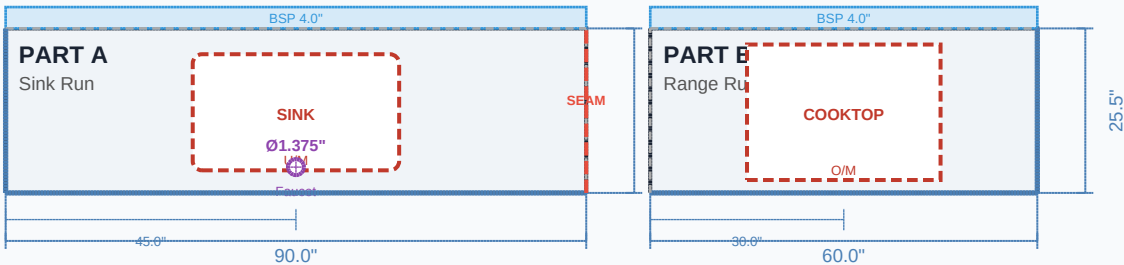

|             |                  |             |                    |                    |
|-------------|------------------|-------------|--------------------|--------------------|
| 150         | 3                | 0           | 0.00               | 0                  |
| Total Units | Total Assemblies | Total Parts | Stone Area (sq ft) | Stone Area (sq in) |

Assembly Breakdown

- Kitchen: 3

Unit Type Breakdown

- Type A1: 50
- Type A1-MIR: 50
- Type B1: 50

Part Type Breakdown