

The Highland Residences

Client: Highland Construction

Material: Calacatta Quartz 3cm

Address: 789 Highland Ave, Denver CO

Issue Date: —

Status: Draft

Prepared By: —

30	3	0	0.0	2	6
Total Units	Total Assemblies	Total Parts	Total Sq Ft	Unit Types	Total Sheets

1 Bed / 1 Bath

Assemblies: 1 · Parts (pieces): 1 · Stone area: 19.5 sq ft

Units (10):

101, 201, 301, 401, 501, 105, 205, 305, 405, 505

Assembly Types:

- Kitchen

ASSEMBLY DETAILS


Assembly: A1 Kitchen
Type: Kitchen | Variant: STANDARD

PART A — Main Sink Run

- $110.0 \times 25.5 \times 1.25 = 19.46 \text{ Sq ft}$
- Edge FRONT: Eased
 - Edge LEFT: Eased
 - Edge RIGHT: Eased
 - Edge BACK: Raw
 - > Sink (Undermount): 30.0"×18.0"
 - Faucet: Ø1.375" @ (55.0", 3.5")
 - Soap Dispenser: Ø1.375" @ (48.0", 3.5")
 - Backsplash: 110.0"×4.0"
 - Left Splash: 24.25"×4.0"
 - Right Splash: 24.25"×4.0"

FABRICATION NOTES:

Template required for wall scribing.

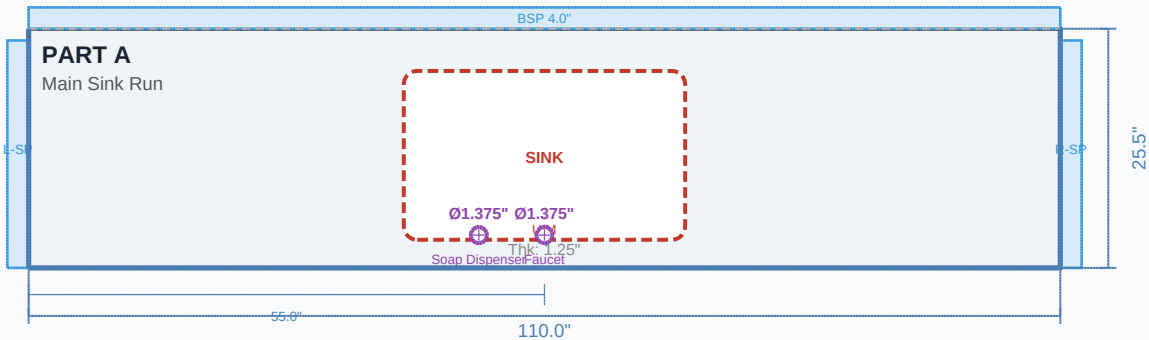

2 Bed / 2 Bath

Assemblies: 1 · Parts (pieces): 2 · Stone area: 26.6 sq ft

Units (20):

103, 203, 303, 403, 503, 104, 204, 304, 404, 504, 107, 207, 307, 407, 507, 108, 208, 308, 408, 508

Assembly Types:

- Kitchen

ASSEMBLY DETAILS

Assembly: B1 Kitchen
Type: Kitchen | Variant: STANDARD

PART A — Sink Run


- 90.0" x 25.5" = 15.94 Sq Ft
- Edge FRONT: Eased
- Edge LEFT: Eased
- Edge BACK: Raw
- Edge RIGHT: Raw
- > Sink (Undermount): 32.0"x18.0"
- Faucet: Ø1.375" @ (45.0", 4.0")
- Backsplash: 90.0"x4.0"

PART B — Range Run

- 60.0" x 25.5" = 10.02 Sq Ft
- Edge FRONT: Eased
- Edge RIGHT: Eased
- Edge BACK: Raw
- Edge LEFT: Raw
- > Cooktop (Drop In): 30.0"x21.0"
- Backsplash: 60.0"x4.0"

FABRICATION NOTES:

Dogleg seam requires clear epoxy color match.

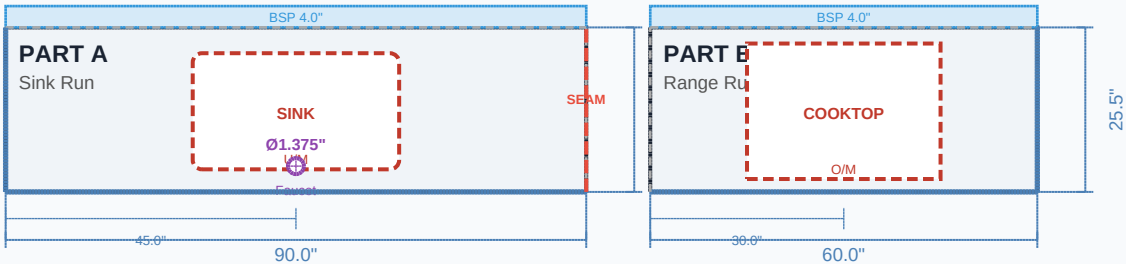

30	3	0	0.00	0
Total Units	Total Assemblies	Total Parts	Stone Area (sq ft)	Stone Area (sq in)

Assembly Breakdown

- Kitchen: 3

Unit Type Breakdown

- Type A1: 10
- Type B1: 20

Part Type Breakdown